



Standard types




- Standard types available from stock
- Single and double cardanic designs
- Furthermore available with frictionally engaged shaft-hub-connection
- Type NNZ (double-cardanic) for very short shaft distance dimensions
- Finish bore according to ISO fit H7, feather keyway according to DIN 6885 sheet 1 - JS9
- -Approved and certified according to EC Standard 94/9/EC

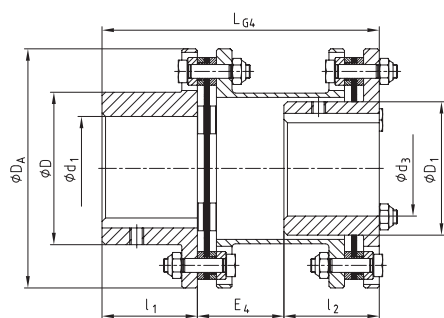


Type NENA 1



Type NENE 1

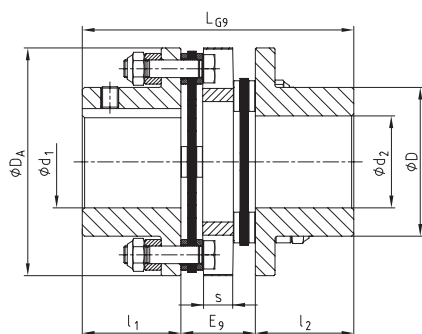

Type NNZ

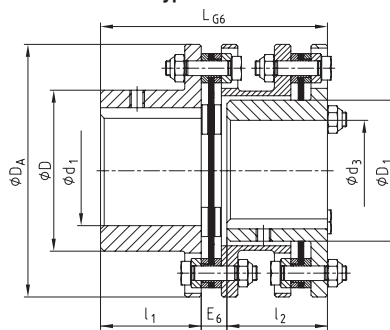

Type NENA 2

RADEX®-N Types NENA 1, NENE 1, NENA 2, NNZ

Size	Max. finish bore		Dimensions [mm]											
	d ₁ /d ₂	d ₃ /d ₄	D	D ₁	D _A	l ₁ /l ₂	L _{G4}	E ₄	L _{G5}	E ₅	L _{G6}	E ₆	L _{G9}	E ₉
20	20	—	32	—	56	20	—	—	—	—	—	—	58	18
25	25	—	40	—	68	25	—	—	—	—	—	—	70	20
35	35	—	54	—	82	40	—	—	—	—	—	—	102	22
38	38	—	58	—	94	45	—	—	—	—	—	—	118	28
42	42	—	68	—	104	45	—	—	—	—	—	—	124	34
50	50	—	78	—	126	55	—	—	—	—	—	—	144	34
60	60	55	88	77	138	55	160	50	114	4	124	14	144	34
70	70	65	102	90	156	65	190	60	134	4	144	14	166	36
80	80	75	117	104	179	75	220	70	154	4	167	17	—	—
85	85	80	123	112	191	80	232	72	164	4	178	18	—	—
90	90	85	132	119	210	80	233	73	166	6	184	24	—	—
105	105	90	147	128	225	90	263	83	186	6	204	24	—	—
115	115	100	163	145	265	100	288	88	206	6	227	27	—	—

Ordering example:

RADEX®-N 60	NENA 1	Ø50	Ø60
Coupling size	Type	Finish bore d ₁	Finish bore d ₂